

## INSTALLATION INSTRUCTIONS



PRODUCTS, INC.

1917 OAK PARK BLVD. • PLEASANT HILL, CA 94523

(925)935-3025 • Fax (925)935-2287

www.dedenbear.com • email@dedenbear.com


Disc Style  
Throttle Stop  
Models TS-6M,  
TS-6BM &  
TS-6SM

### INSTALLATION

- 1) Remove the carburetor, gasket, and mounting studs.
- 2) Install four carb studs of an appropriate length to mount the throttle stop, carburetor, and any spacers / heat shields.
- 3) Install an open or four hole gasket on the intake, any spacers or heat shields, then the throttle stop. The throttle stop can be mounted with the adjustment knob on either the driver or passenger side of the motor. If you decide to mount the stop with the adjustment knob on the passenger side, test fit the carb by gently setting the carb on the stop and checking for interference or clearance problems with the fuel lines.
- 4) A four hole gasket is recommended between the throttle stop and the carburetor, and any open spacers or gaskets should be avoided between the carb and throttle stop.
- 5) Reinstall the carburetor, fuel lines, carb linkage and air pan / air cleaner.

### OPERATION

The manual disc stop's throttle position is adjusted by threading the adjustment knob in or out. Threading in the knob will increase the opening size (raising RPM while on the stop) and threading out the knob will decrease the opening size (lowering RPM while on the stop). Make sure to tighten the locknut after adjustments.

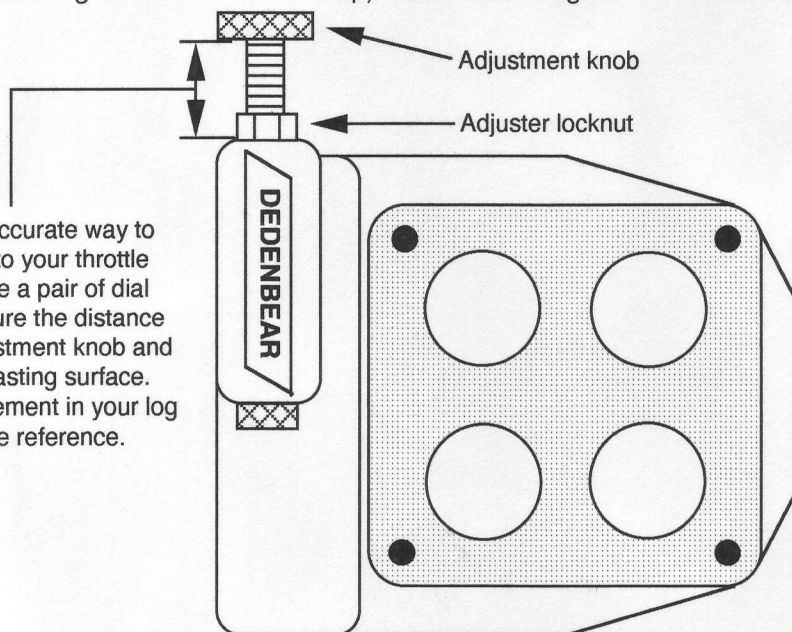

TIP: The most accurate way to make changes to your throttle position is to use a pair of dial calipers to measure the distance between the adjustment knob and the machined casting surface. Keep this measurement in your log book for future reference.

### LIMITED 1 YEAR WARRANTY

Dedenbear Products components are warranted directly by Dedenbear Products against defective materials or workmanship under normal use and service for a period of one (1) year after purchase. Dedenbear Products will repair or replace the defective unit, at Dedenbear Products option, free of charge. This warranty does not cover any damage to the component caused by abuse, mishandling, alteration, accident, electrical current fluctuations, failure to follow installation/operating instructions, maintenance, storage and environmental conditions, acts of God, or repair attempts made by anyone other than Dedenbear Products Authorized Service facility.

DEDENBEAR PRODUCTS SHALL NOT BE LIABLE FOR INJURY, CONSEQUENTIAL, OR OTHER TYPE DAMAGES RESULTING FROM THE USE OF ITS PRODUCTS, OTHER THAN THE LIABILITY STATED ABOVE. This warranty is in lieu of all other warranties of merchantability or fitness of use. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

**FOR SERVICE** on all Dedenbear Products, return directly to: DEDENBEAR PRODUCTS, INC. • ATTN: REPAIRS • 1917 OAK PARK BLVD. • PLEASANT HILL, CA 94523. Please include a note describing the nature of the problem, a copy of your original invoice, your name, return shipping address, and daytime & evening phone numbers where you can be reached.

**CUSTOMER SERVICE & TECH. SUPPORT : (925)935-3025 Mon-Fri 8am-5pm PST**